


IRC series

S10-M


Socket for Interface relay

Type	S10-M I/O socket for IRC relays, 16A Logic connection , 2 x A2
Rated current	16 A
Specifications	
Rated load	16 A/250 V
Insulation	Test voltage V rms 1 min 5 kV
– All terminals/DIN rail	
Cross-section of connecting wire	
– Single-wire	4 mm ² or 2 x 2,5 mm ²
– Multi-wire	22 - 14 AWG
Max. screw torque	1,2 Nm
Screw dimensions	M3, Pozi, slot
Integrated retaining clip/plastic	for relay series C10, CSS detachable
Labelling space	1...6; DIN/EN
Connection label	
Mounting	DIN rail TS35 or mounting plate
Ambient temperature operation/storage	-40 (no ice)...60 °C /-40 ... 80 °C
Socket for plug-in 10A IRC relays	C10A, C10G, C10T and CSS






Accessories	
Coil bridge bars	V10-G, V10-E V10-R V10-A B20-G, B20-R B20-A

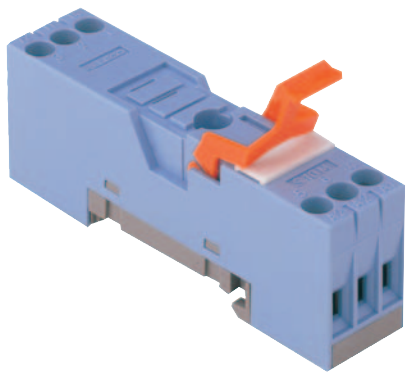

Connection diagram

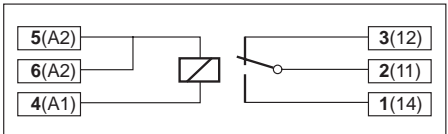

Dimensions [mm]

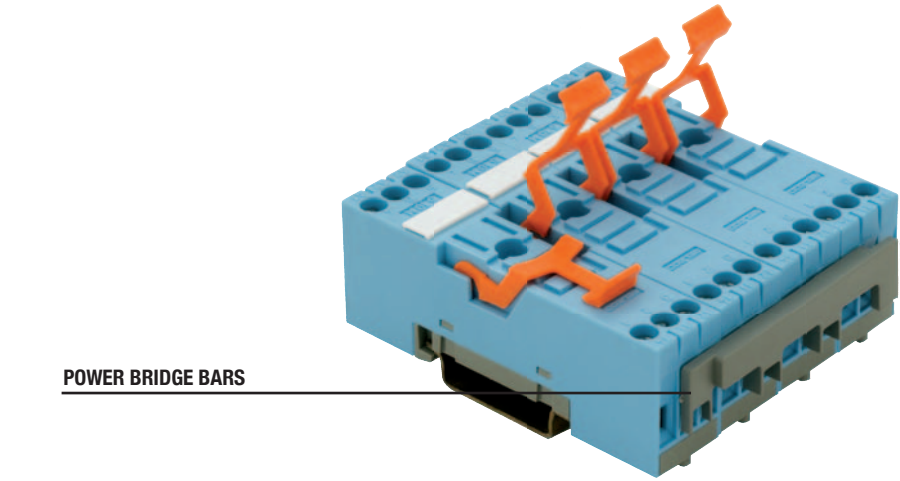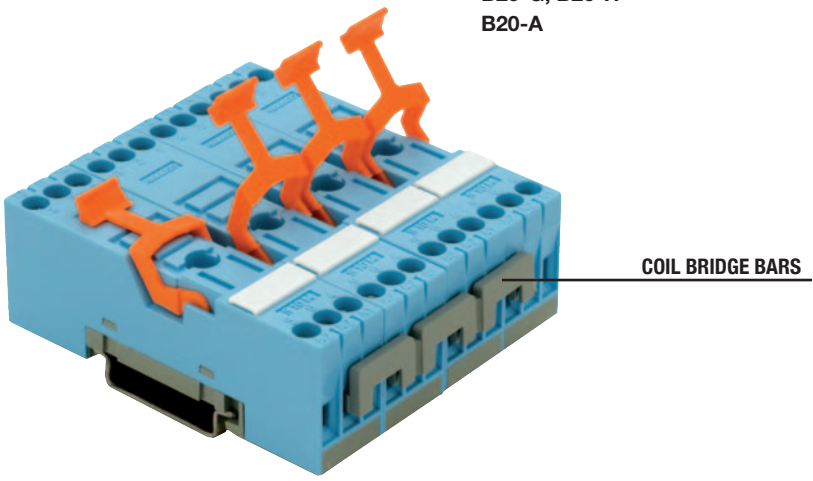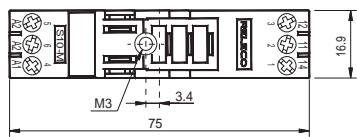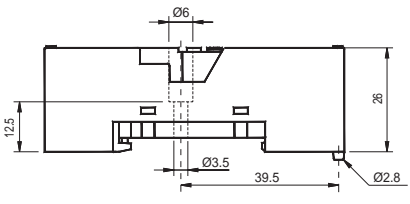

Technical approvals, conformities





Kühn Controls AG

Notes:

You want more information about this product, please call us: tel: +49 (0)7082-940000 or send us a fax: +49 (0)7082-940001, or email: sales@kuehn-controls.de or visit our Website: www.kuehn-controls.de